
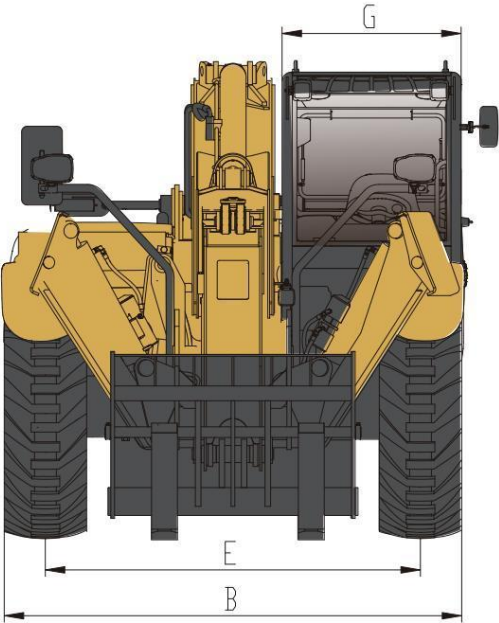
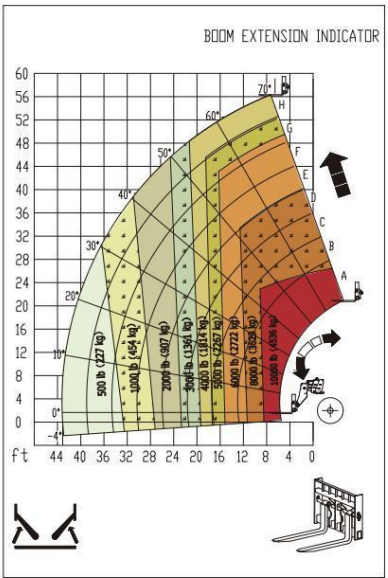
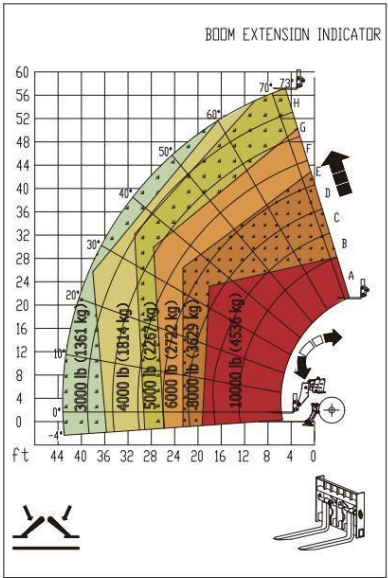
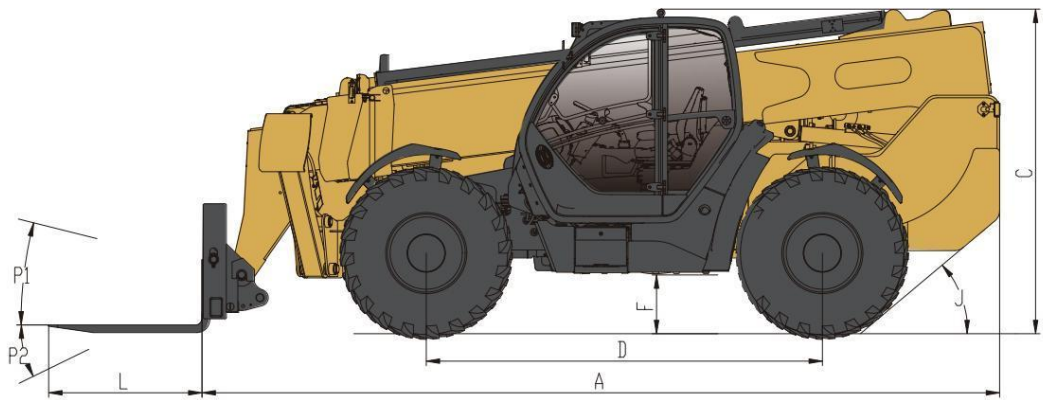


主要技术参数		Main technical parameters
型号	model	CZ45-18
整机重量	Whole machine weight	14500kg
整机尺寸宽度	Overall dimensions and width	2490mm
整机尺寸高度	Overall dimensions and height	2700mm
整机尺寸长度	Overall dimensions and length	6950mm
整机尺寸长度	Overall dimensions and length	3900mm
离地间隙	Ground clearance	450mm
车架调平范围	Frame leveling range	±10°
最大起重量	Maximum lifting capacity	4500kg
最大起升高度	Maximum lifting height	17.9m
外伸距	outreach	13.2m
最大高度吊重量	Maximum lifting capacity at height	1100kg
最大幅度吊重量	Maximum lifting capacity	900kg
最大行驶速度	Maximum driving speed	34km/h
爬坡能力(重载)	Climbing ability (heavy load)	50°
转弯半径(外轮)	Turning radius (outer wheel)	5.2m

性能参数		performance parameter	
挡位	Gear position	两档（高低速）	Two gears (high and low speed)
传动方式	Transmission mode	静液压驱动	Hydrostatic Drive
驱动桥	Drive axle	湿式制动	Wet braking
转向模式	Steering mode	前桥/蟹行/四轮模式	Front axle/crab ride/four-wheel
液压系统	Hydraulic system	力士乐	Rexroth
轮胎规格	Tire specifications	17.5	seventeen point five
燃油种类	Fuel type	柴油	diesel oil
柴油油箱容量	Diesel fuel tank capacity	210L	
液压油箱容量	Hydraulic oil tank capacity	230L	
发动机功率/转速	Engine power/speed	97KW/2200	
发动机品牌/排放	Engine brand/emissions	康明斯/国三	Cummins/National III
控制方式	Control method	比例控制	Proportional control

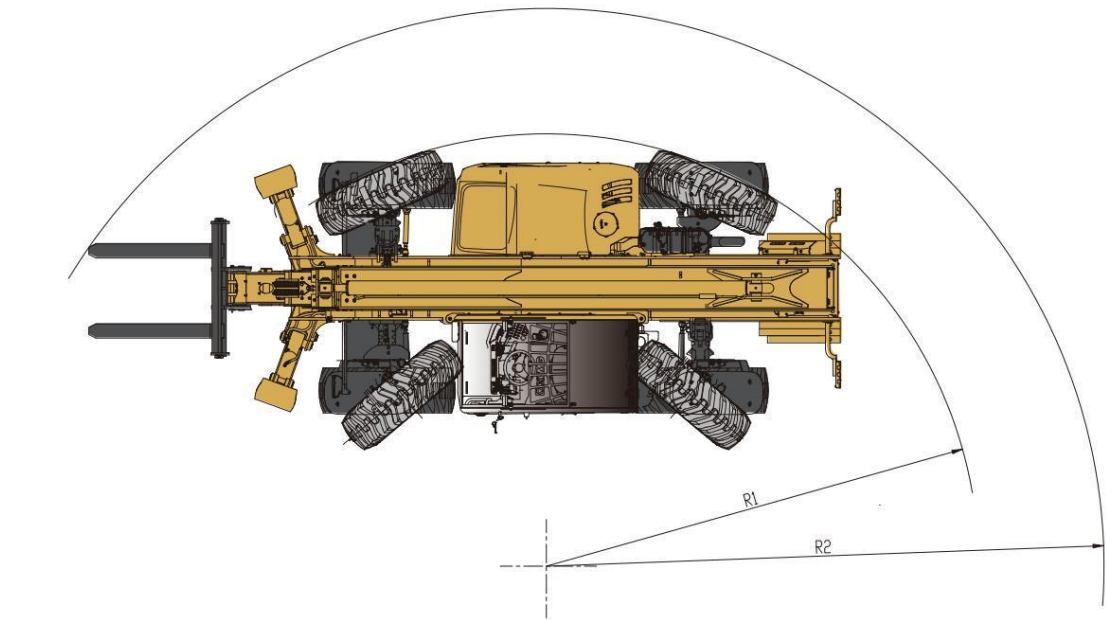

随技术进步，产品结构、参数等不断改进，恕不另行通知。样本信息与实物不符的以实物为准
With the advancement of technology, product structure, parameters, etc. are constantly improving without further notice. If the sample information does not match the actual product, the actual product shall prevail